65 ROCWOOD FLOORING

The fast applying, quick drying, smooth surface that TOPS them all!

WESTERN ROC-WOOD

"Diamond-Hard" Flooring Material

Resurfaces and Patches Wood Floors

THE PRACTICAL SOLUTION TO RAILROAD CAR FLOORING PROBLEMS. Ready for the job on short notice, Roc-Wood is especially suited to a program of up-grading railroad cars, and does it at a reasonable cost.

If the sub-flooring is basically sound, the existing floor can be quickly prepared for application. Roc-Wood comes complete, needs no additives, is simple to mix, easy to apply. It smooths easily, fusing to the base and surrounding materials as it hardens by chemical action to a monolithic surface — light-in-weight, seamless and splinter-proof.

TWO SPECIALIZED FORMULAS FOR CAR FLOORING NEEDS:

- Roc-Wood *Nailable* for box cars

  Unit packaging: Dry Mix, 40-lb. bags—Activator, 5-gal. pails

  Covers approximately 15 square feet, ¾ inch thickness, a total of ⅞ inch including metal lath

- Roc-Wood *Regular* for stock cars, cabooses, head-end cars and industrial and warehouse flooring where nailing is not required

  Unit packaging: Dry Mix, 50-lb. bags—Gel, 5-gal. pails

  Covers approximately 18 square feet, ⅝ inch thickness, a total of ¾ inch including metal lath

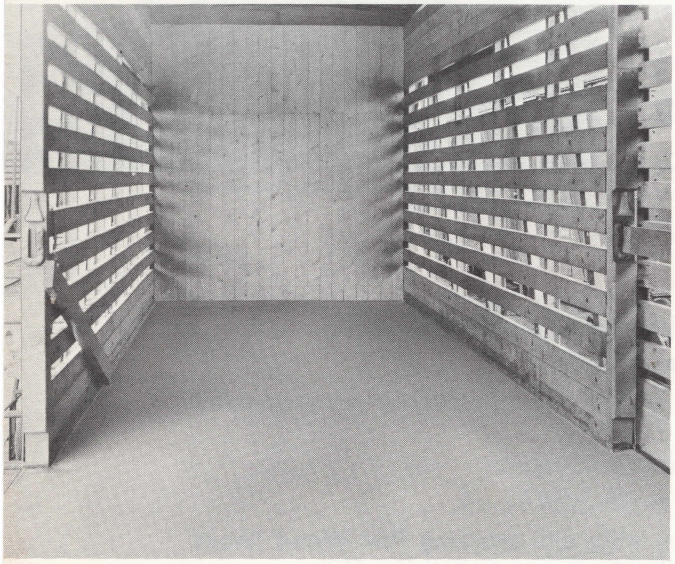

Flooring can be brush finished or given a billiard smoothness.

ROC-WOOD'S FEATURES:

- **Assures a stronger floor.** When applied over a sound floor, Roc-Wood adds 80% greater structural strength.
- **Reduces claims.** Its smooth, splinter-free qualities make it "preferred" for damage-free loading of bagged and packaged merchandise.
- **Finish.** Surface can be brush finished or made billiard smooth.
- **Vermin-free.** The chemical composition Roc-Wood "seals out" infestation in cars carrying grain, flour and other food products.
- **Fire-resistant.** It will not support a flame. High temperature blow torch does no more than scorch it.
- **Seamless, easily cleaned.** Cars can be hosed down, vacuumed or swept more thoroughly and in less time than with other types of flooring.
- **Non-absorbent.** Roc-Wood floors have a low absorption rate for liquids.
- **Floors have long life.** You can figure 10 years of hard service from Roc-Wood floors.
- **Easily repaired.** When fix up is required, just mix a small amount of Roc-Wood and repairs can be completed in minutes, just like applying wood putty.
- **Entire floor is nailable.** With use of Roc-Wood *Nailable*, you can brace shipments without fear of damage for it's splinter-proof.
- **Impervious to most acids.** Roc-Wood *Regular* is impervious to most acids, including uric and lactic acids, and is not affected by oil, grease or animal fats.
- **Skid-proof.** Roc-Wood *Regular* is skid-proof even under water, providing a "safety-floor."

ROC-WOOD FLOORING PRODUCTS CO.

WESTERN RAILROAD SUPPLY COMPANY

Division of Western Industries, Inc.

2742 West 36th Place, Chicago, Illinois 60632

Big job, little job . . . whenever personnel is available

ROC-WOOD comes complete, READY FOR ACTION

WESTERN ROC-WOOD "DIAMOND-HARD" FLOORING MATERIAL

- Minimum down time
- Maximum serviceability
- Real economy
- Easy to mix, easy to apply
- Fuses to the base and surrounding materials
- Provides a smooth floor for years of safe, durable use

Roc-Wood comes complete, ready for mixing and easy application.

Especially suited to a program of up-grading box cars, stock cars and head-end equipment, Roc-Wood provides a smooth, splinter-free, monolithic floor, seamless and joint-free.

FEELS LIKE WOOD . . . WEARS LIKE ROCK. Roc-Wood is a scientifically formulated flooring material—not an asphalt derivative—for permanently resurfacing and patching all types of wooden floors. Composed of the hardest of hardwood fibers, Roc-Wood is chemically treated and bonded with an indestructible plastic binder, assuring an interlocking density of wood fibers for structural strength.

There's no room for error when you're mixing this outstanding flooring material. No guess work: it is scientifically mixed at the factory to assure uniformity in mix. Easy-to-follow directions are contained with each unit.

Roc-Wood is fast, simple to apply, requires no special skill. It can be mixed by your own maintenance man, and a trowel and darby are the most specialized tools required. It is easy to work with, smooths as you lay it and readily fuses to the base and surrounding materials to provide years of safe, durable floor life.

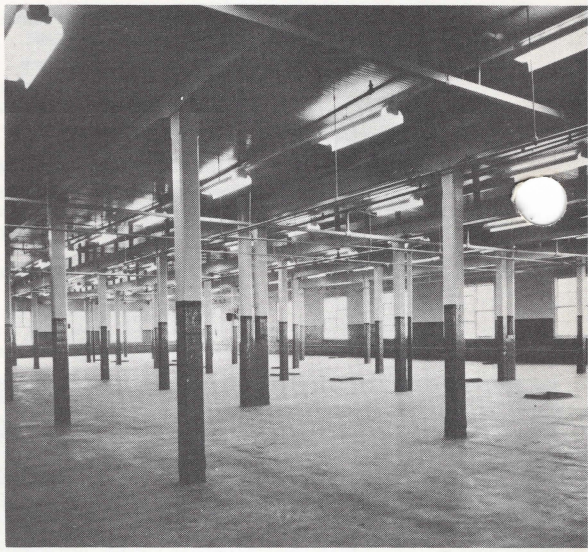
A smooth, diamond-hard surface for industrial and warehouse floors.

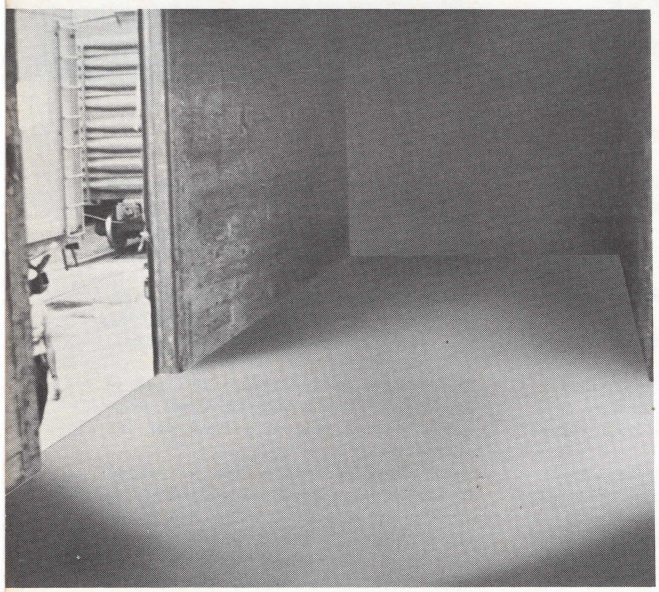
If the sub-flooring is sound, the existing floor can be quickly prepared for Roc-Wood application.

Two specialized formulas for railroad car flooring needs:

For box cars use Roc-Wood *Nailable*

For stock cars, head-end cars and others *where nailing is not required*, use Roc-Wood *Regular*

Advantages:

- Can be applied by your own maintenance men.
- Normal setting time, 4 hours.
- Dries by chemical action, with practically no expansion or contraction.
- Can be walked on within 12 hours.
- Ready for trucking in about 48 hours.
- Instructions for preparing and applying Roc-Wood floors are enclosed in each bag of Roc-Wood Dry Mix.

ROC-WOOD FLOORING PRODUCTS CO.

WESTERN RAILROAD SUPPLY COMPANY

Division of Western Industries, Inc.

2742 West 36th Place, Chicago, Illinois 60632

Form: RW 963

Printed in U.S.A.